



KuPower

SUPER HIGH EFFICIENCY

POLY^{GEN 4} MODULE

CS3K-285 | 290 | 295 | 300P

(1000 V / 1500 V)

With Canadian Solar's industry leading poly-PERC cell technology and the innovative LIC (Low Internal Current) module technology, we are now able to offer our global customers high power poly modules up to 300 W.

The KuPower poly modules with a dimension of 1675 × 992 mm, close to our 60 cell modules, have the following unique features:

- **Higher** power classes for equivalent module sizes
- **High** module efficiency up to 18.05 %
- **LOW** hot spot temperature risk
- **LOW** temperature coefficient (Pmax): -0.38 % / °C
- **LOW** NMOT (Nominal Module Operating Temperature): 43 ± 2 °C



More power output thanks to
low NMOT: 43 ± 2 °C



Low power loss in cell
connection



Safer: lower hot spot
temperature




Heavy snow load up to 6000 Pa,
wind load up to 4000 Pa*



Low BoS cost with
1500 V_{DC} system voltage

*For detailed information, please refer to Installation Manual.

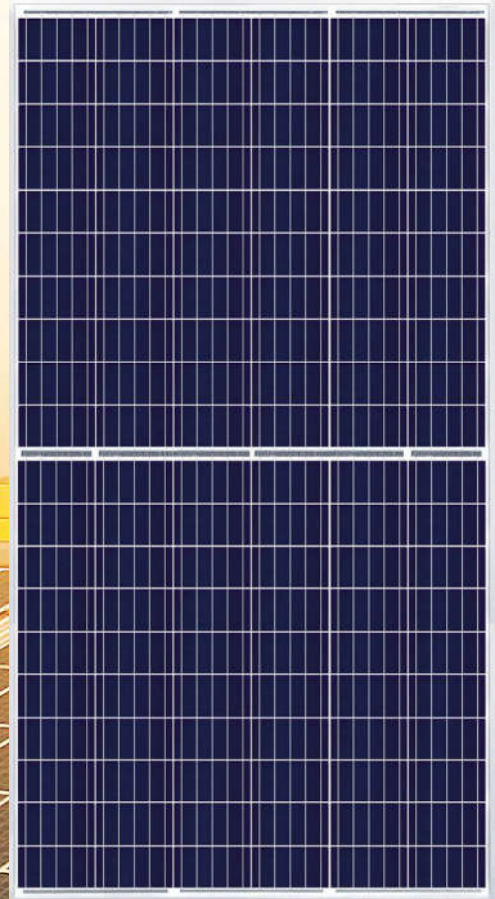

*Black frame product can be provided upon request.



linear power output warranty



**product warranty on materials
and workmanship**

PRODUCT CERTIFICATES*


IEC 61215 / IEC 61730: 2005 & 2016: VDE / CE
CEC AU (Expected by end of Aug, 2017)
UL 1703: CSA




* Please contact your local Canadian Solar sales representative for the specific product certificates applicable in your market.

ENGINEERING DRAWING (mm)


Rear View

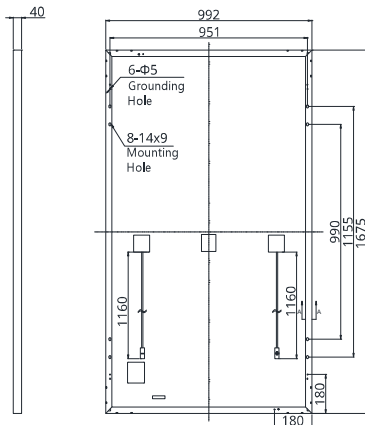


Frame Cross Section A-A



Mounting Hole



CS3K-290P / I-V CURVES

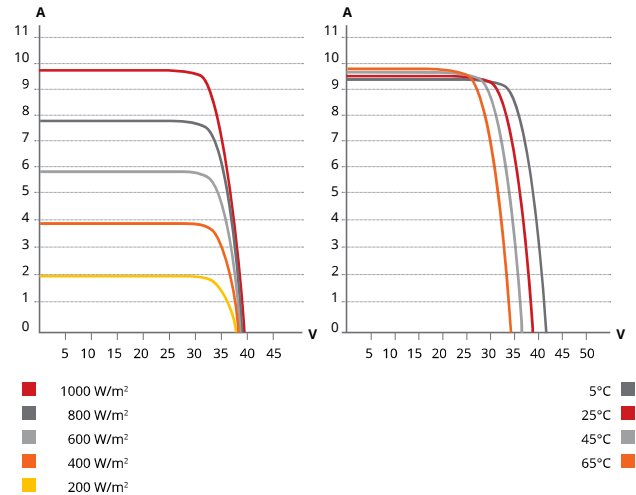

ELECTRICAL DATA | STC*

CS3K	285P	290P	295P	300P
Nominal Max. Power (Pmax)	285 W	290 W	295 W	300 W
Opt. Operating Voltage (Vmp)	32.1 V	32.3 V	32.5 V	32.7 V
Opt. Operating Current (Imp)	8.92 A	8.98 A	9.08 A	9.18 A
Open Circuit Voltage (Voc)	38.7 V	38.9 V	39.1 V	39.3 V
Short Circuit Current (Isc)	9.42 A	9.49 A	9.57 A	9.65 A
Module Efficiency	17.15%	17.45%	17.75%	18.05%
Operating Temperature	-40°C ~ +85°C			
Max. System Voltage	1000 V (IEC / UL) or 1500 V (IEC)			
Module Fire Performance	TYPE 1 (UL 1703) or CLASS C (IEC 61730)			
Max. Series Fuse Rating	30 A			
Application Classification	Class A			
Power Tolerance	0 ~ + 5 W			

* Under Standard Test Conditions (STC) of irradiance of 1000 W/m², spectrum AM 1.5 and cell temperature of 25°C. Measurement uncertainty: ±3 % (Pmax).

ELECTRICAL DATA | NMOT*

CS3K	285P	290P	295P	300P
Nominal Max. Power (Pmax)	210 W	214 W	218 W	222 W
Opt. Operating Voltage (Vmp)	29.3 V	29.5 V	29.7 V	29.8 V
Opt. Operating Current (Imp)	7.17 A	7.26 A	7.35 A	7.45 A
Open Circuit Voltage (Voc)	36.1 V	36.3 V	36.5 V	36.7 V
Short Circuit Current (Isc)	7.60 A	7.67 A	7.73 A	7.79 A

* Under Nominal Module Operating Temperature (NMOT), irradiance of 800 W/m², spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s.

MECHANICAL DATA

Specification	Data
Cell Type	Poly-crystalline, 156.75 × 78.38 mm
Cell Arrangement	120 [2 × (10 × 6)]
Dimensions	1675 × 992 × 40 mm (65.9 × 39.1 × 1.57 in)
Weight	18.5 kg (40.8 lbs)
Front Cover	3.2 mm tempered glass
Frame	Anodized aluminium alloy
J-Box	IP68, 3 diodes
Cable	4.0 mm ² (IEC), 12 AWG (UL), 1160 mm
Connector	T4 series or MC4 series
Per Pallet	27 pieces
Per Container (40' HQ)	756 pieces

TEMPERATURE CHARACTERISTICS

Specification	Data
Temperature Coefficient (Pmax)	-0.38 % / °C
Temperature Coefficient (Voc)	-0.29 % / °C
Temperature Coefficient (Isc)	0.05 % / °C
Nominal Module Operating Temperature	43±2 °C



ELECTRICAL SOLUTIONS

McNae Electrical Solutions Ltd

MAIL | PO Box 9086, Palmerston North 4441

OFFICE | 451 Kairanga Bunnythorpe Rd, RD8,
Palmerston North 4478

T | 06 3570405 **W** | mcnae.co.nz

E | info@mcnae.co.nz

The aforesaid datasheet only provides the general information on Canadian Solar products and, due to the on-going innovation and improvement, please always contact your local Canadian Solar sales representative for the updated information on specifications, key features and certification requirements of Canadian Solar products in your region.

Please be kindly advised that PV modules should be handled and installed by qualified people who have professional skills and please carefully read the safety and installation instructions before using our PV modules.

CANADIAN SOLAR INC. August 2017. All rights reserved, PV Module Product Datasheet V5.55C2_AU
CANADIAN SOLAR INC. c/o Canadian Solar Australia 1 Pty Ltd, 165 Cremorne Street, Richmond, VIC 3121, Australia
support@canadiansolar.com, www.canadiansolar.com/au

* Manufactured and assembled in China.